

Versatile and Rugged Lead-Based Industrial Charger Series



- **California Energy Compliant**
- **Rugged and reliable design**
- **Capable of direct charge or BMS**
- **Power phase-back with temperature**
- **Wide operating temperature range**
- **Transient protected input/output**
- **Active I/O reverse polarity protection**
- **Informative LED display**
- **Optional wireless/digital interface**
- **Relay and discrete I/O signals**
- **Over temp protection with auto reset**
- **Overcurrent / overvoltage protected**
- **Four year warranty**

Description

The V-series is an environmentally robust and sophisticated battery chargers with models supporting Lead-based batteries. With a wide operating temperature range (-25°C to 65°C), a rugged mechanical design, and AC or DC input power options, this product is well suited for high end industrial applications. The charger complies with the California Energy Commission guidelines and with UL/CSA specifications.

The enclosure is sealed and impervious to pollutants, The unique mechanical design provides extremely high power density and environmental reliability.

The V-series optional external communications can be programmed with user specific firmware. The product may be ordered with an optional user defined set of discrete I/O signals, a wireless option, an RS-232 or

RS-485, CAN or other interfaces.

An informative LED display indicates state of charge, input power present, battery voltage and current, fault conditions and proper battery connection are standard. The V-series charger precisely controls the charging algorithm to insure a complete recharge while prolonging battery life. The charger can be programmed for direct pack charging or with a BMS (battery management system) equipped pack.

The V-series can be connected indefinitely making it ideal for remote and standby applications. It is mountable in any orientation and can be ordered with input and output power connectors per customer specification. Customized charging algorithms, power sequencing and control/monitoring options are available upon request.

AC input model specifications


PARAMETER	DESCRIPTION / CONDITIONS
AC input voltage range	3 input ranges covering 85 VAC - 240 VAC
Input AC amps (max)	Measured at 85 VAC / 400 watts output: 8 Arms
AC input configuration	AC input: line, neutral , chassis ground
Connector	Nema 5-15P

DC input model specifications

PARAMETER	DESCRIPTION / CONDITIONS
DC input voltage range	8 input ranges covering 11 VDC to 500 VDC
Input DC amps (max)	Measured at 48 VDC / 400 watts output: 10 A
DC input configuration	DC input: DC Power, DC Return, Chassis ground
Connector	Ring terminals or user defined

V-Series Model Specific Specifications

Four Stage Lead-based battery charging curve

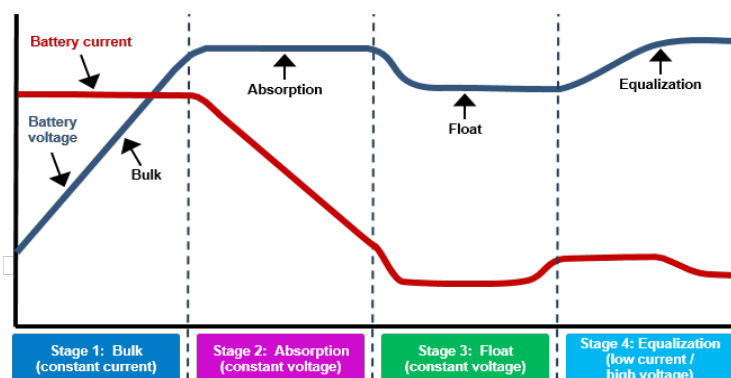

Charging algorithm: Supplies constant current I_{max} to battery until absorption voltage is reached (V_{FSTERM}). Transition to absorption mode follows and regulates battery voltage at V_{FSTERM} until current decreases to I_{ABTERM} . Float mode follows and regulates battery voltage at V_{FLOAT} . At the user's discretion, an equalization mode can be initiated. The equalization voltage V_{EQ} is approximately 2.5V/cell and battery current is limited. For more information, please refer to www.chargetek.com/images/pdfs/equal.pdf

Standard LED indicators

PARAMETER	GREEN	RED/GREEN	RED	RED on/off	GREEN on/off
state of charge	Complete	Top Off	Constant Current	-	-
battery voltage (volts)	< 75% of V_{FSTERM}	75% to 85% of V_{FSTERM}	85% to 95% of V_{FSTERM}	> 95% of V_{FSTERM}	-
battery current (amps)	< 10% of I_{max}	10% to 30% of I_{max}	30% to 90% I_{max}	> 90% of I_{max}	-
fault indicator	Polarity OK	Short/Reversed	Battery < 2.7V/cell	Over Voltage	Over Temperature
input power	Power Good	-	-	-	-

V-Series Model Lead-Based Charger Common Specifications

CHARGING PARAMETERS	DESCRIPTION
Absorption transition time-out	10 hours following 85% of V_{FSTERM} (factory settable upon request)
Max charging time	Terminate if $> I_{max}/3 > 15$ hours (factory settable upon request)
Overvoltage protection	Maximum Charging Voltage + 1.0V
Output noise and ripple (PARD)	<150mV, 100MHz BW
Regulation	$\pm 0.5\%$
Efficiency	Measured at max power, varies from 80% to 92% depending on model

V-Series Charging Specifications

6V battery bank (3S)

PARAMETER	DESCRIPTION / CONDITIONS	VALUE	UNITS
V_{FSTERM}	Fast charge transition voltage	7.3 ±0.1	VDC
V_{FLOAT}	Float voltage, $I_{OUT} < I_{FS}$, 25°C	6.8 ±0.1	VDC
I_{max}	Maximum charging current	40.0±2.0	Amps
I_{ABTERM}	Absorption transition current	2.0 ±0.1	Amps
V_{EQ}	Equalization voltage @ < 1Amp	7.8 ±0.1	volts
I_{SBY}	Max standby current, AC off	1.0	ma

18V battery bank (9S)

PARAMETER	DESCRIPTION / CONDITIONS	VALUE	UNITS
V_{FSTERM}	Fast charge transition voltage	21.9 ±0.1	VDC
V_{FLOAT}	Float voltage, $I_{OUT} < I_{FS}$, 25°C	20.4 ±0.1	VDC
I_{max}	Maximum charging current	15.0±1.0	Amps
I_{ABTERM}	Absorption transition current	1.5 ±0.1	Amps
V_{EQ}	Equalization voltage @ < 1Amp	23.3 ±0.1	volts
I_{SBY}	Max standby current, AC off	1.3	ma

36V battery bank (18S)

PARAMETER	DESCRIPTION / CONDITIONS	VALUE	UNITS
V_{FSTERM}	Fast charge transition voltage	43.8 ±0.2	VDC
V_{FLOAT}	Float voltage, $I_{OUT} < I_{FS}$, 25°C	13.5 ±0.2	VDC
I_{max}	Maximum charging current	8.0 ±0.5	Amps
I_{ABTERM}	Absorption transition current	1.5 ±0.1	Amps
V_{EQ}	Equalization voltage @ < 1Amp	46.5 ±0.2	volts
I_{SBY}	Max standby current, AC off	1.8	ma

60V battery bank (30S)

PARAMETER	DESCRIPTION / CONDITIONS	VALUE	UNITS
V_{FSTERM}	Fast charge transition voltage	73.0 ±0.2	VDC
V_{FLOAT}	Float voltage, $I_{OUT} < I_{FS}$, 25°C	68.0±0.2	VDC
I_{max}	Maximum charging current	5.0 ±0.2	Amps
I_{ABTERM}	Absorption transition current	1.0 ±0.1	Amps
V_{EQ}	Equalization voltage, <1A	77.5 ±0.2	volts
I_{SBY}	Max standby current, AC off	2.0	ma

12V battery bank (6S)

PARAMETER	DESCRIPTION / CONDITIONS	VALUE	UNITS
V_{FSTERM}	Fast charge transition voltage	14.6 ±0.1	VDC
V_{FLOAT}	Float voltage, $I_{OUT} < I_{FS}$, 25°C	13.6 ±0.1	VDC
I_{max}	Maximum charging current	20.0 ±1.0	Amps
I_{ABTERM}	Absorption transition current	1.5 ±0.1	Amps
V_{EQ}	Equalization voltage @ < 1Amp	15.5±0.1	volts
I_{SBY}	Max standby current, AC off	1.0	ma

24V battery bank (12S)

PARAMETER	DESCRIPTION / CONDITIONS	VALUE	UNITS
V_{FSTERM}	Fast charge transition voltage	29.2 ±0.1	VDC
V_{FLOAT}	Float voltage, $I_{OUT} < I_{FS}$, 25°C	27.2 ±0.1	VDC
I_{max}	Maximum charging current	12.0 ±0.1	Amps
I_{ABTERM}	Absorption transition current	1.5 ±0.1	Amps
V_{EQ}	Equalization voltage, <1A	31.0±0.1	volts
I_{SBY}	Max standby current, AC off	1.5	ma

48V battery bank (24S)

PARAMETER	DESCRIPTION / CONDITIONS	VALUE	UNITS
V_{FSTERM}	Fast charge transition voltage	58.4 ±0.2	VDC
V_{FLOAT}	Float voltage, $I_{OUT} < I_{FS}$, 25°C	54.4 ±0.2	VDC
I_{max}	Maximum charging current	6±0.5	Amps
I_{ABTERM}	Absorption transition current	1.0 ±0.1	Amps
V_{EQ}	Equalization voltage @ < 1Amp	62.0 ±0.2	volts
I_{SBY}	Max standby current, AC off	1.	ma

72V battery bank (36S)

PARAMETER	DESCRIPTION / CONDITIONS	VALUE	UNITS
V_{FSTERM}	Fast charge transition voltage	87.6 ±0.3	VDC
V_{FLOAT}	Float voltage, $I_{OUT} < I_{FS}$, 25°C	81.6 ±0.3	VDC
I_{max}	Maximum charging current	4.0 ±0.2	Amps
I_{ABTERM}	Absorption transition current	1.0 ±0.1	Amps
V_{EQ}	Equalization voltage, <1A	93.0 ±0.3	volts
I_{SBY}	Max standby current, AC off	2.0	ma

V-Series Ordering Guide, p/n GbK-xyz-r

P/N Field	Definition	Options	Description																																
b	Input Power	A - AC input E - DC input	See description of field z in the part number for input voltage range options.																																
x	Number of Series Cells Defines the output voltage.	For Lead-based chargers the options are: 3S, 6S, 9S, 12S, 18S, 24S, 30S, 36S and 150S	This option determines the Nominal Charging Voltage for Lead-based batteries. For Lead-based chargers the nominal output voltage is the number of cells multiplied by the nominal cell voltage of 2.0V. For example, option 12S would specify a 24V charger, (12 times 2.0V/cell = 24V)																																
y	Maximum Charging Current	Maximum Charging Current in amps. For standard model the maximum charging current is determined by the number of Series Cells, see tables to the right. If a lower maximum output current is desired then it is specified in this field as amps. For example a standard AC input Lead-based 6S model is ordered as GAV-S620-1. If a charger with a maximum output current of 15 amps is needed the order number would be GAV-S615-1.	<table border="1"> <thead> <tr> <th colspan="2">Maximum Charging Current vs. Number of Series Cells</th> </tr> <tr> <th>Series Cells</th> <th>Max. Current</th> </tr> </thead> <tbody> <tr> <td>6V(3S)</td> <td>40 Amps</td> </tr> <tr> <td>12V(6S)</td> <td>20 Amps</td> </tr> <tr> <td>18V(9S)</td> <td>15 Amps</td> </tr> <tr> <td>24V(12S)</td> <td>12 Amps</td> </tr> <tr> <td>36V(18S)</td> <td>8 Amps</td> </tr> <tr> <td>48V(24S)</td> <td>6 Amps</td> </tr> <tr> <td>60V(30S)</td> <td>5 Amps</td> </tr> <tr> <td>72V(36S)</td> <td>4 Amps</td> </tr> </tbody> </table>	Maximum Charging Current vs. Number of Series Cells		Series Cells	Max. Current	6V(3S)	40 Amps	12V(6S)	20 Amps	18V(9S)	15 Amps	24V(12S)	12 Amps	36V(18S)	8 Amps	48V(24S)	6 Amps	60V(30S)	5 Amps	72V(36S)	4 Amps												
Maximum Charging Current vs. Number of Series Cells																																			
Series Cells	Max. Current																																		
6V(3S)	40 Amps																																		
12V(6S)	20 Amps																																		
18V(9S)	15 Amps																																		
24V(12S)	12 Amps																																		
36V(18S)	8 Amps																																		
48V(24S)	6 Amps																																		
60V(30S)	5 Amps																																		
72V(36S)	4 Amps																																		
z	Input voltage range	For AC input chargers, three options; 01, 02, and 03 are available For DC input chargers, eight options; 07, 08, 09, 10, 11, 12, 13, and 14 are available.	<table border="1"> <thead> <tr> <th colspan="4">Input Voltage Range Options</th> </tr> <tr> <th>Option</th> <th>Input Voltage Range</th> <th>Option</th> <th>Input Voltage Range</th> </tr> </thead> <tbody> <tr> <td>01</td> <td>85 - 140 VAC</td> <td>09</td> <td>30 - 50 VDC</td> </tr> <tr> <td>02</td> <td>180 - 300 VAC</td> <td>10</td> <td>38 - 75 VDC</td> </tr> <tr> <td>03</td> <td>85 - 300 VAC</td> <td>11</td> <td>72 - 140 VDC</td> </tr> <tr> <td>07</td> <td>11 - 20 VDC</td> <td>12</td> <td>100 - 200 VDC</td> </tr> <tr> <td>08</td> <td>18 - 36 VDC</td> <td>13</td> <td>150 - 300 VDC</td> </tr> <tr> <td></td> <td></td> <td>14</td> <td>250 - 500 VDC</td> </tr> </tbody> </table>	Input Voltage Range Options				Option	Input Voltage Range	Option	Input Voltage Range	01	85 - 140 VAC	09	30 - 50 VDC	02	180 - 300 VAC	10	38 - 75 VDC	03	85 - 300 VAC	11	72 - 140 VDC	07	11 - 20 VDC	12	100 - 200 VDC	08	18 - 36 VDC	13	150 - 300 VDC			14	250 - 500 VDC
Input Voltage Range Options																																			
Option	Input Voltage Range	Option	Input Voltage Range																																
01	85 - 140 VAC	09	30 - 50 VDC																																
02	180 - 300 VAC	10	38 - 75 VDC																																
03	85 - 300 VAC	11	72 - 140 VDC																																
07	11 - 20 VDC	12	100 - 200 VDC																																
08	18 - 36 VDC	13	150 - 300 VDC																																
		14	250 - 500 VDC																																
r	Options	List of Available Options, listed separated by '-' characters, some options are mutually exclusive. An: External Interface Rxy: Internal Relay	An: External Interface, choose n as follows: 0 - RS-232, 1 - RS-485, 2 - Wired Ethernet, 3 - CAN, 5 - Wireless Ethernet, 99 - Special Rxy: Internal Relay, there can be up to 4 internal relays x = relay configuration; O for NO, C for NC y = function; 1 - Over voltage, 2 - Charging, 3 - Over temperature, 4 - AC On																																
<p>Example: GAV-S620-01-RA1-RC3-RO4 specifies a Lead based AC input(A) charger with maximum output voltage set to charge 6-series cells, 12V (S6) at a maximum current of 20 amps (20) and the AC input range is 85-140 VAC (01). The chargers has options for an RS-485 interface (RA1) with two relays, NC Over Temperature (RC3) and NO AC On (RO4)</p>																																			

Certifications and Compliance (model dependant - consult factory)

a	UL CSA
b	CE mark
c	California Energy Compliant
d	RF emissions: US FCC Part 15 Class A, CISPR 22:2009
e	IEC 555, power factor
f	IEC 61000-4-5; Class 4 Severity Level, Surge
g	IEEE C2-2012 National Electrical Safety Code
h	NFPA 70-2014 National Electric Code
i	IEC 60950 Safety of IT Equipment; Pollution Degree 2
j	WEEE and Restriction of Hazardous Substances (ROHS) Directives 2002/95/EC
k	T-Mark

Workmanship specifications

IPC-610	Acceptability of electronic assemblies IPC J-STD-006 Requirements for electronic grade solder alloys and fluxed and non-fluxed solid solders for electronic soldering applications
IPC-2221	FR4, 130C 94V-0
IPC/WHMA-A-620	Requirements and acceptance of wiring and cabling


Mechanical specifications

PARAMETER	(units are in inches and pounds)
Dimensions	11.24 (L) x 6.02 (W) x 3.92 (H)
Chassis material	Aluminum
Chassis finish	Black anodized
Clearance	12 inches all sides
Mounting	#6 screws at eight locations
Output connector	Terminal lugs or user defined
Weight	Four pounds
Optional connector when applicable	Please consult factory
Forced Air Rating	Please consult factory

Environmental specifications

PARAMETER	DESCRIPTION / CONDITIONS
Operating environment	Indoor/outdoor - IP67 -not submersible
Storage temp.	-40°C to +80°C
Operating temp.	-20°C to +60°C at maximum output over entire DC voltage range
Humidity	0°C to +95°C relative humidity (non-condensing)
Operational altitude	10,000 feet
Vibration	MIL-STD-810 or IEC60068-2-6 and -2-64 as applicable
Shock	MIL-STD-810 or IEC60068-2-27 as applicable
Isolation	Input - chassis: 2KVDC Input - output: 2KVDC Output - chassis: 500VDC
DC leakage current	Input - chassis: < 200uA at 2KVDC Input - output: < 100uA at 2KVDC
AC leakage current	< 3.5mA at 264VAC, 60Hz

Control and Monitor Interfaces

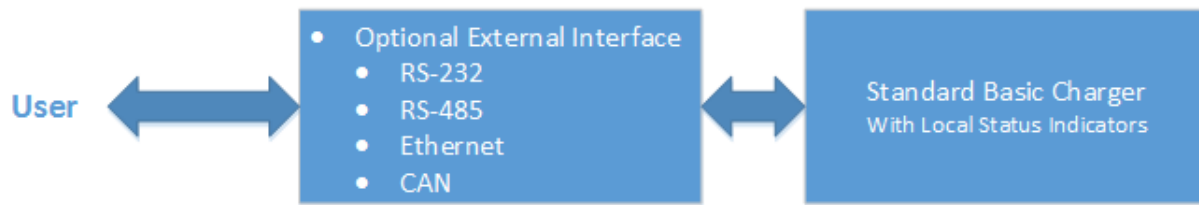

Standard Control Functions:

- On/Off
- Terminating Voltage
- Current Limiting
- Termination Current
- Pre-charge Current

Standard Monitoring Functions:

- Charger State
- Errors

Standard Monitoring Functions:

- Charger State
- Voltage
- Current
- Control Settings
- Temperature
- Status, Warnings, Errors

Outline and mounting

